



Information subject to change without notice. Consult the factory for the most current data and part numbers.

Component dimensions are shown in inches.

Alarm Hub Datasheet

Overview

Provides outputs to controls via 5 discreet outputs.

Operating time

100% (continuous duty)

Voltage type

12-24 VDC, 7.5A normal operating range
(can accept 11-32 VDC)

Operating temperature

-40°C to +60°C

Material

Body material – Die-cast Aluminum Alloy w/ Powder Coat
Seals – Pre-formed Silicon Rubber Gasket

Connection

Woodhead, bulgin or amphenol

Mounting options

Bolt on bracket


Hazardous locations

Class 1 Zone 2

Ex nA IIB, Groups T3

Certified to: CSA C22.2 NO. 142-1987

CSA C22.2 NO. 60079-0:07 IEC E60079-15:02, UL std 1604, 508

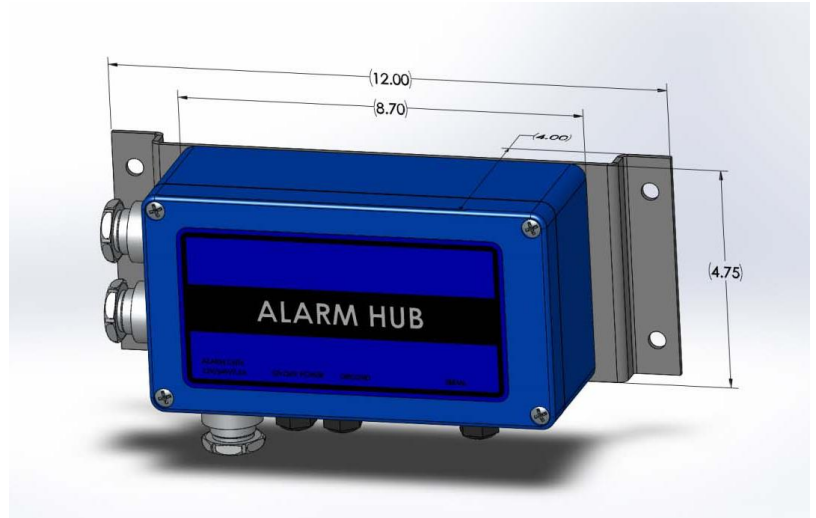

Cranesmart Systems, Inc.

4908 97 St.

Edmonton, AB

T6E 5S1

Ph: 780.437.2986

Email: info@cranesmart.com