



Information subject to change without notice. Consult the factory for the most current data and part numbers.

Component dimensions are shown in inches.

Light Standard Datasheet

Overview

The Cranesmart Light Standard will issue a warning if hoists approach or exceed their rated capacity.

Operating time

100% (continuous duty)

Voltage type

12-24 VDC

Operating temperature

-40°C to +60°C

Construction

- 16 gauge steel body and cover
- Welded seams without knockouts or holes
- Seamless poured-in place gasket
- Door includes a quarter turn slot for added safety

Connection

Certified electrical connection

Mounting options


Custom for alarm station location

Hazardous locations

Alarm station is typically not mounted in the classified zone.

Environmental Ingress Protection

IP67

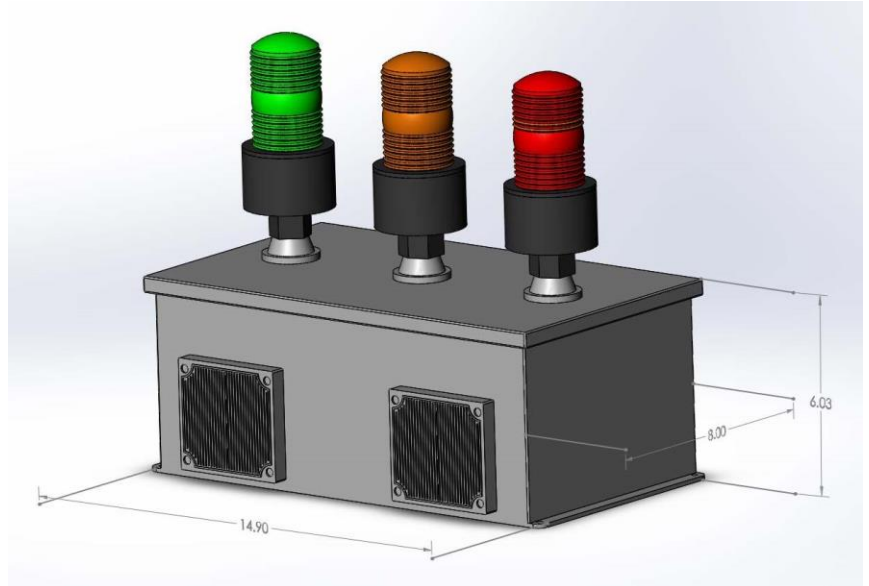

Cranesmart Systems, Inc.
4908 97 St.
Edmonton, AB
T6E 5S1
Ph: 780.437.2986
Email: info@cranesmart.com