



Information subject to change without notice. Consult the factory for the most current data and part numbers.

Component dimensions are shown in inches.

4-20mA DAC Datasheet

Overview

The Digital to Analog converter, when used with load, outputs 4mA for zero load, up to a range limit of 20mA for full output. The component can also be configured for wireless signal transmission if necessary.

Operating time

100% (continuous duty)

Voltage type

12-24 VDC

Operating temperature

-40°C to +60°C

Material


Body material – compression molded fibreglass
Seals – Polyurethane gasket

Connection

Woodhead or Bulgin

Mounting options

Bolt on bracket

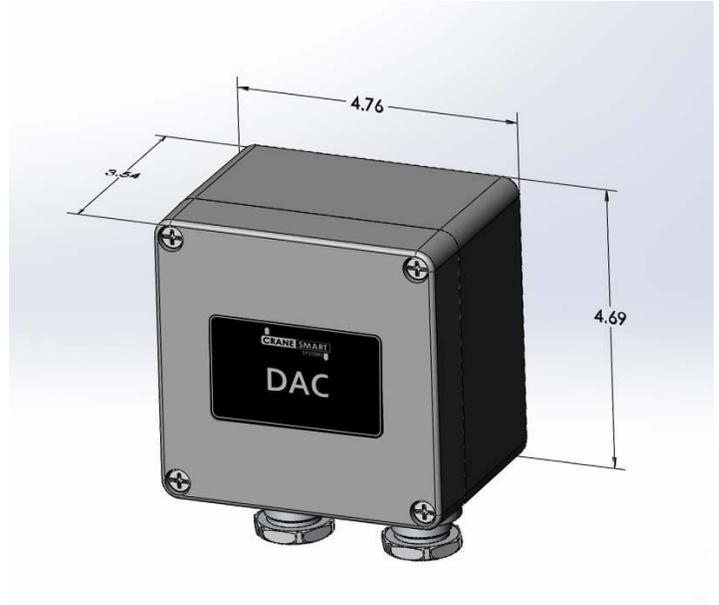

Cranesmart Systems, Inc.
4908 97 St.
Edmonton, AB
T6E 5S1
Ph: 780.437.2986
Email: info@cranesmart.com