



Information subject to change without notice. Consult the factory for the most current data and part numbers.

Component dimensions are shown in inches.

Digital Integration Module Datasheet

Overview

Integrates with an existing system to provide 6-12 input/output control points

Operating time

100% (continuous duty)

Voltage type

12-24 VDC, 7.5A normal operating range
(can accept 11-32 VDC)

Operating temperature

-40°C to +60°C

Material

Body material – compression molded fibreglass
Seals – Polyurethane gasket

Connection

Woodhead, bulgin or amphenol

Mounting options

Bolt on bracket

Hazardous locations

North America:

Class I Division 2 Gr ABCD T3

Class I Zone 2, AEx nA IIC T3

Ex nA IIC T3

Ta = -40°C to +60°C


12/24 Vdc 7.5A

IECEX:

Ex nA IIC T5 Gc

Ta = -40°C to +60°C

12/24 Vdc 7.5A

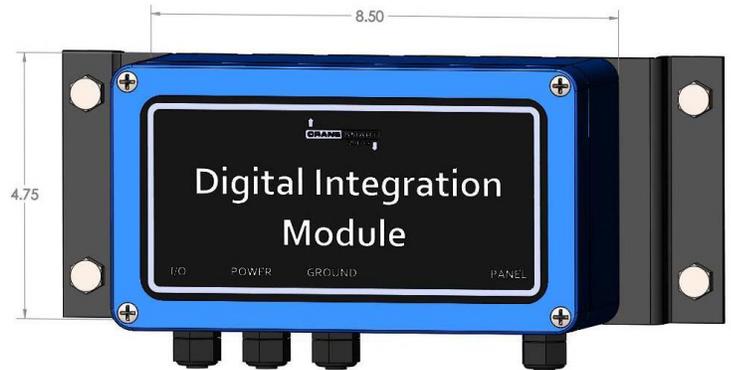

Cranesmart Systems, Inc.
4908 97 St.
Edmonton, AB
T6E 5S1
Ph: 780.437.2986
Email: info@cranesmart.com