



*\*Information subject to change without notice. Consult the factory for the most current data and part numbers.\**

*\*Component dimensions are shown in inches.\**

## Light Standard Datasheet

### Overview

The Cranesmart Light Standard will issue a warning if hoists approach or exceed their rated capacity.

### Operating time

100% (continuous duty)

### Voltage type

12-24 VDC

### Operating temperature

-40°C to +60°C

### Construction

- 16 gauge steel body and cover
- Welded seams without knockouts or holes
- Seamless poured-in place gasket
- Door includes a quarter turn slot for added safety

### Connection

Certified electrical connection

### Mounting options


Custom for alarm station location

### Hazardous locations

Alarm station is typically not mounted in the classified zone.

### Environmental Ingress Protection

IP67

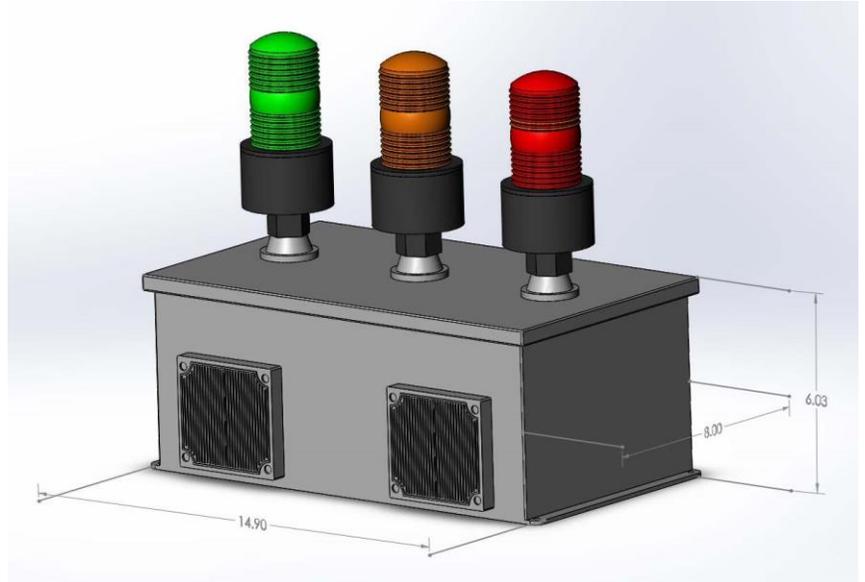

Cranesmart Systems, Inc.  
4908 97 St.  
Edmonton, AB  
T6E 5S1  
Ph: 780.437.2986  
Email: [info@cranesmart.com](mailto:info@cranesmart.com)